

330Watt

Features




Higher Bifaciality

Higher bifaciality increases the current output under bifacial illumination.



Unique design, superior Transmittance

Unique design of visibility and placement to meet light transmittance and waterproofing requirements.



Good Mechanical Load

Certified to withstand: wind load (2400 Pa), snow load and hail strike(5400 Pa) .



Low Light Resilience

Advanced glass and cell surface texture designs ensure excellent performance in low light environment.



Environmental Durability

Good performance of Anti-PID & Salt mist certified by 2 PfG 2387/01.18 and IEC61701.



Mechanical Characteristics


Cell Type	Mono-crystalline
Dimensions	2094x1133x30 mm
Transparency	45 %
Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, MC4 Compatible, 3 Bypass Diode
Packaging Configuration	1x4.0 mm ² , Length: 300 mm or Customized Length
Output Cables	74pcs/stack, 814pcs/40'HQContainer (Two pallets=One stack)

Temperature & Maximum Ratings

Operating Temperature (°C)	-40 °C ~ +85 °C
Nominal Operating Cell Temperature	45 ± 2 °C
Temperature Coefficients of Pmax	-0.35% / °C
Temperature Coefficients of Voc	-0.275% / °C
Temperature Coefficients of Isc	0.045% / °C
Power Tolerance	0 ~ +3W
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	25 A


Electrical Characteristics at Standard Test Conditions (STC)

Maximum Power - Pmax (W)	330
Maximum Power Voltage - Vmp (V)	25.00
Maximum Power Current - Imp (A)	13.20
Open-circuit Voltage - Voc (V)	28.46
Short-circuit Current - Isc (A)	14.03



12
years
Product warranty

25
years
Linear power warranty

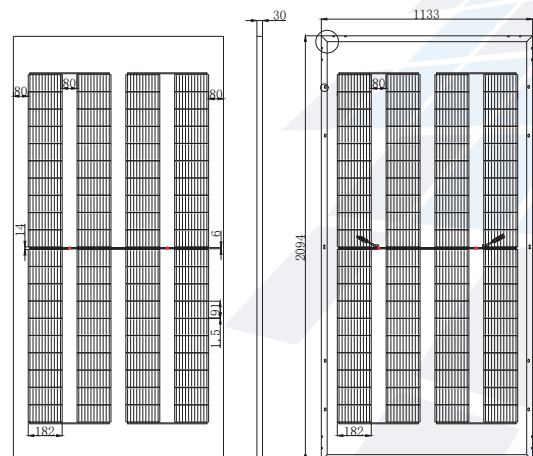

The company reserves the final right for explanation on any of the information presented hereby.